


## METRIC SIZES

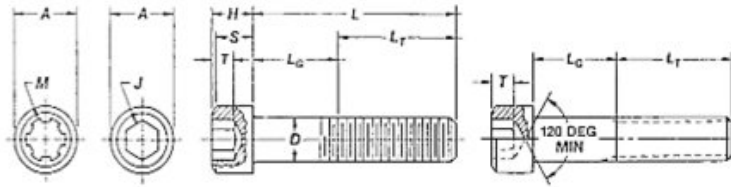

DIMENSIONS OF SOCKET HEAD CAP SCREWS in mm  
ISO 4762 / DIN 921 - UNI 5931

Nom. Size	D Body Diameter		A Head Diameter		H Head Height		J Hex Socket Size		T Key Engagement	Lt Thread Length
	max	min	max	min	max	min	max	min	min	
M8	8.00	7.78	13.27	12.73	8.00	7.64	6.14	6.02	4.00	28.00
M10	10.00	9.78	16.27	15.73	10.00	9.64	8.18	8.03	5.00	32.00
M12	12.00	11.73	18.27	17.73	12.00	11.57	10.18	10.03	6.00	36.00
M14	14.00	13.73	21.33	20.67	14.00	13.57	12.21	12.03	7.00	40.00
M16	16.00	15.73	24.33	23.67	16.00	15.57	14.21	14.03	8.00	44.00
M18	18.00	17.73	27.33	26.67	18.00	17.57	14.21	14.03	9.00	48.00
M20	20.00	19.67	30.33	29.67	20.00	19.48	17.23	17.05	10.00	52.00
M22	22.00	21.67	33.39	32.61	22.00	21.48	17.23	17.05	11.00	56.00
M24	24.00	23.67	36.39	35.61	24.00	23.48	19.28	19.70	12.00	60.00
M27	27.00	26.67	40.39	39.61	27.00	26.48	19.28	19.70	13.50	66.00
M30	30.00	29.67	45.39	44.61	30.00	29.48	22.28	22.07	15.50	72.00
M33	33.00	32.61	50.39	49.61	33.00	32.38	24.28	24.07	18.00	78.00
M36	36.00	35.61	54.46	53.54	36.00	35.38	27.28	27.07	19.00	84.00
M39	39.00	38.61	58.46	57.54	39.00	38.38	27.28	27.07	21.00	90.00
M42	42.00	41.61	63.46	62.54	42.00	41.38	32.33	32.08	24.00	96.00
M45	45.00	44.61	67.46	66.54	45.00	44.38	32.33	32.08	26.00	102.00
M48	48.00	47.61	72.46	71.54	48.00	47.38	36.33	36.08	28.00	108.00
M52	52.00	51.54	78.54	77.48	52.00	51.26	36.33	36.08	31.00	115.00